



Publication number : **0 649 042 A2**

12

EUROPEAN PATENT APPLICATION

21 Application number : **94307535.8**

51 Int. Cl.⁸ : **G02B 17/06**

22 Date of filing : **13.10.94**

30 Priority : **16.10.93 GB 9321408**

43 Date of publication of application :
19.04.95 Bulletin 95/16

84 Designated Contracting States :
DE FR GB IT


71 Applicant : **BRITISH AEROSPACE PUBLIC
LIMITED COMPANY**
Warwick House,
P.O. Box 87,
Farnborough Aerospace Centre
Farnborough, Hants. GU14 6YU (GB)

72 Inventor : **Hall, Peter Reginald**
42 Wilbury Way,
Hitchin
Hertfordshire, SG4 0TP (GB)

74 Representative : **Potts, Susan Patricia et al**
British Aerospace plc
Lancaster House
P.O. Box 87,
Farnborough Aerospace Centre
Farnborough, Hants. GU14 6YU (GB)

54 Optical beam expander.

57 A beam expander suitable for use with laser machining apparatus comprises a convex paraboloidal surface 7 and a concave paraboloidal surface 8 formed from a single metal element 10. The expander has an optional zoom facility provided by a plane mirror 12, moveable along an input-output axis, for altering the position of an incident beam on the convex surface 7 thereby altering the magnification of the system.

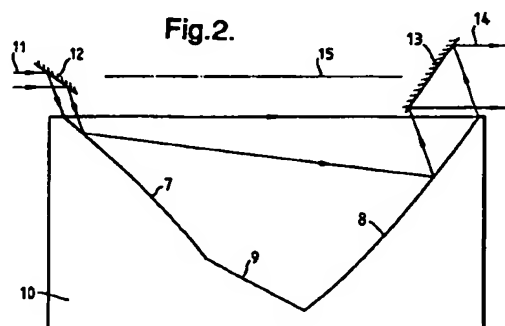

EP 0 649 042 A2

This invention relates to a beam expander comprising two substantially confocal, generally conic reflective surfaces for use for example to expand a laser beam for laser machinery.

EP-A-098,193 discloses a beam expander which includes two, separate confocal mirrors, a first mirror being convex and a second one being concave. These mirrors may be aspheres or other conic sections. The magnification of the beam expander disclosed therein however, cannot be varied, i.e. there is no zoom capability.

A catoptric system having a zoom capability is disclosed in US 4812030. This Cassegrain arrangement achieves a variable magnification by moving the powered reflectors with respect to one another.

It is one object of this invention to provide a laser beam expander which can be machined from a single element.

It is a further object of this invention to provide a laser beam expander in which a variable magnification (or zoom facility) can be provided by a means which does not require movement of any powered optical element.

In this specification the term conic is used to denote those curves forming conic sections and the surfaces of revolution thereof, including convex and concave parabolas and convex and concave ellipses, as well as toric developments of such surfaces, and portions thereof.

According to one aspect of this invention, there is provided an optical beam expander, comprising a first reflective surface of conic profile for receiving an optical beam and for reflecting it onto a confocal second, reflective surface of conic profile thence to reflect it onwards, in which one reflective surface is convex and the other is concave, and characterised in that said first and second reflective surfaces are formed on a single element.

According to a further aspect of the invention there is provided an optical beam expander comprising a first reflective surface of conic profile for receiving an optical beam and reflecting it towards a confocal, second reflective surface of conic profile thence to reflect it onwards, characterised in that said system further comprises variable magnification means for adjusting the position of the received optical beam on the first reflective surface, thereby to adjust the magnification of said expander.

The variable magnification means may comprise a moveable plane mirror, for example, and the reflective surfaces may be either separate elements or may be formed on one single element.

Using this invention, beam expanders can be designed which are monolithic, machined from a single piece of metal, giving great advantages in stability of beam direction, in stability of collimation, and in having good heat sinking capabilities.

Known optical systems which change the focal

length or magnification as the result of dioptric lenses or mirrors (or both) moving relative to each other have some disadvantages. For example, it is only possible to achieve true zoom stability of aberrations for a limited number of points during the zoom process; that is, at a set of specific magnifications. At other magnifications there is a small increase or instability of aberration. This invention considerably reduces this difficulty.

Some embodiments of the invention will now be described by way of example only, reference being made to the accompanying drawings, in which:-

Figure 1 is a schematic diagram of optical apparatus illustrating a first embodiment of this invention;

Figure 2 is a schematic diagram of optical apparatus illustrating a second embodiment of this invention, which provides a zoom facility;

Figure 3 is a schematic diagram showing a transverse cross-section of a third embodiment of this invention, including two toric parabolic reflectors; Figure 4 is a schematic diagram of a fourth embodiment of this invention, including a concave ellipsoidal reflector and a convex paraboloidal reflector;

Figure 5 is a schematic diagram of a fifth embodiment of this invention, including a concave paraboloidal reflector and a convex ellipsoidal reflector, and

Figure 6 is a schematic diagram of a sixth embodiment of this invention, including a convex and a concave ellipsoidal reflector.

In Figure 1 a convex paraboloidal reflector 1 and a concave paraboloidal reflector 2 have a common focal point 3. An input beam 4 travelling in a direction parallel to the axis of symmetry 'A' of the apparatus, is reflected firstly off the convex reflector 1 and thence off the concave reflector 2 to emerge as an expanded, collimated beam 5. The emerging beam 5 travels parallel to the input beam 4, but in the opposite direction. It will be noted from inspection of Figure 1 that the optical path through the apparatus does not pass through the focal point 3.

Although the input beam 4 is corrected for collimation, the system of figure 1 suffers from a large off-focus again Sine Condition, and this feature is used for advantage in the variable magnification expander to be described below.

A beam expander of the type illustrated in Figure 1 can be fabricated from a single metal element by diamond turning techniques, and would consist of just those regions of the paraboloidal surfaces which are required to reflect the beam viz. those regions designated 1A and 2A in Figure 1.

Detailed examination of the region of the intersection 6 of the convex reflector 1 and the concave reflector 2 of Figure 1 shows that very close to the intersection 6, incidence beams exit with substantially

the same diameter as when they entered. The further away from the intersection 6 the rays enter, the greater is the ratio between their spacing in entrance and exit apertures. While the expansion ratio changes across the surface, the rate of change can be arranged to be sufficiently small as not to affect the light distribution of the beam.

It has been noted that the beam expander of Figure 1 suffers from controlled amounts of Offence against Sine-Condition. This means that if the input beam is moved across the input surface, while remaining parallel to the axis of rotational symmetry, the output beam will alter in diameter to provide a zoom system. In contrast to known systems, the advantage is that this is true for all input positions.

Referring then to Figure 2 this embodiment comprises a convex paraboloidal surface 7 and a confocal concave paraboloidal surface 8 joined to the convex surface by an intermediate section 9. The two surfaces and the intermediate section are formed from one piece of metal 10 by, for example, a single diamond point turning lathe. This provides a monolithic structure making it easier to achieve uniformity of alignment and focusing in the presence of thermal expansion. The intermediate section 9 provides a locally thickened section which provides enhanced heat transfer between the reflecting surfaces 7 and 8.

An incoming beam directed along an input path 11 is deflected by a first plane mirror 12 to be incident on the convex paraboloidal surface 7 at a selected position thereon and in a direction parallel to the axis of rotational symmetry of the apparatus. The beam is reflected onto the second, concave surface 8 and thence onto a second plane mirror 13 to exit along a path 14 collinear with the input path 11 and an input/output axis 15.

The plane mirrors 12, 13 are mounted for movement towards and away from each other along the input / output axis 15, by suitable mechanical or electromechanical arrangements (not shown) to adjust the position of incidence of the input beam on the convex paraboloidal mirror 7 and to pick up the beam reflected off the concave paraboloidal mirror 8. In the position shown in figure 2, approximately x4 magnification is provided. The magnification factor reduces to about 1.5x as the plane mirrors 12, 13 move towards each other. The upper value of the magnification is limited only by the size of the machines on which such components are made. The lower limit is set by an arbitrary need to prevent the input and output folding mirrors clashing at their point of closest approach (near x1).

The arrangements described above have several advantages. Both dioptric surfaces face in the same direction and are concentric with the same optical axis. Thus they can be manufactured at the same time and this permits greater accuracy of alignment of the two surfaces relative to each other. Accuracy

of alignment is important for achieving perfect performance. A monolithic structure means that subsequent motion of the two relative to each other is negligible, creating improved long term stability.

Particularly in the case of the variable magnification expander of Figure 2, since the system returns the beam parallel to its input direction, only two plane mirrors are required, in a particularly compact arrangement, to achieve co-linearity of input and exit beams. The arrangement allows the design of compact zoom systems with very few components, and good on-axis correction with correction at all magnifications, thus resulting in improved performance, lower cost and smaller size. Furthermore, the system produces much simpler zoom configurations. Many known zoom configurations require lenses instead of mirrors, and these result in much higher costs and also much lower power handling capabilities.

Figures 3 - 6 inclusive show further variants of a beam expander in accordance with the invention.

In figure 3, a concave toric paraboloid reflector 16 and a convex toric paraboloid reflector 17 are arranged with their respective circular loci of focus 18 co-linear with each other and their toric generatrices. A collimated beam is incident on the convex surface 17 and reflected on to the concave surface 16 whence it is re-collimated and reflected in a direction opposite and parallel to the direction of the incoming beam. In this arrangement, the curvature in both sagittal and tangential sections may be different, to allow different magnification in each section, thereby anamorphosing the aperture.

The embodiments of Figures 4 and 5 provide systems which transform a collimated input into a focused output. Thus in Figure 4, a concave ellipsoidal surface 19 and a convex paraboloid surface 20 are arranged so that the focus of the convex surface 20 is co-incident with one of the foci of the concave surface 19. Collimated incoming rays are reflected divergently by the convex surface 20 and are focused by the concave ellipsoidal surface 19 onto the non-common focus of the ellipsoid 19. The divergence θ of the output rays is proportional to the offset D of the input beam from the optical axis A.

In Figure 5, a concave paraboloid surface 21 and a convex ellipsoidal surface 22 are arranged so that the focus of the concave surface 21 is co-incident with one of the foci of the convex surface 22. Incoming collimated rays are this time reflected from the concave surface 21 onto the convex surface 22 to emerge as a diverging beam. Again the offset D of the incoming rays from the optical axis A, is related to the divergence θ .

In Figure 6, a concave ellipsoidal surface 23 has one focus co-incident with one of the foci of a convex ellipsoidal surface 24. Incoming rays at an angle θ to the optical axis A and converging through a focus of the concave surface 23 are reflected from the con-

cave and convex surfaces to emerge with an angle of divergence ψ proportional to θ .

Claims

1. An optical beam expander comprising a first reflective surface of conic profile (1) for receiving an optical beam (4) and reflecting it onto a second confocal reflective surface of conic profile (2) thence to reflect it onwards, in which one reflective surface is convex and the other is concave, and characterised in that said first and second reflective surfaces (1) (2) are formed on a single element.
2. An optical beam expander comprising a first reflective surface of conic profile (7) for receiving an optical beam and reflecting it towards a confocal second reflective surface of conic profile (8) thence to reflect it onwards, in which one reflective surface is convex and the other is concave, and characterised in that said system further comprises variable magnification means for adjusting the position the received optical beam on the first reflective surface (7) thereby to adjust the magnification of said expander.
3. An optical beam expander according to claim 2 in which both reflective surfaces (7,8) are formed on a single element (10).
4. An optical beam expander according to either of claims 1 or 3 in which an intermediate region of said single element (10) between said first (7) and second (8) reflective surfaces is of increased cross-sectional area to enhance heat transfer through said element.
5. An optical beam expander according to any of claims 2 to 4 in which the variable magnification means comprises a moveable plane mirror (12).
6. A beam expander according to any preceding claim in which the first reflective surface is a convex paraboloidal surface (7) and the second reflective surface is a concave paraboloidal surface (8).
7. A beam expander according to any of claims 1 to 5 in which the first reflective surface (17) is a convex toric paraboloid and the second (16) is a concentric concave toric paraboloid.
8. A beam expander according to claim 7 in which the curvatures of said reflective surfaces (16, 17) in the tangential and sagittal sections differ, thereby providing different magnifications.
9. A beam expander according to any of claims 1 to 5 in which one of said first and second reflective surfaces is paraboloidal (20) and the other thereof is ellipsoidal (19).
10. A beam expander according to any of claims 1 to 5 in which each of said reflective surfaces (23), (24) is ellipsoidal.

Fig.1.

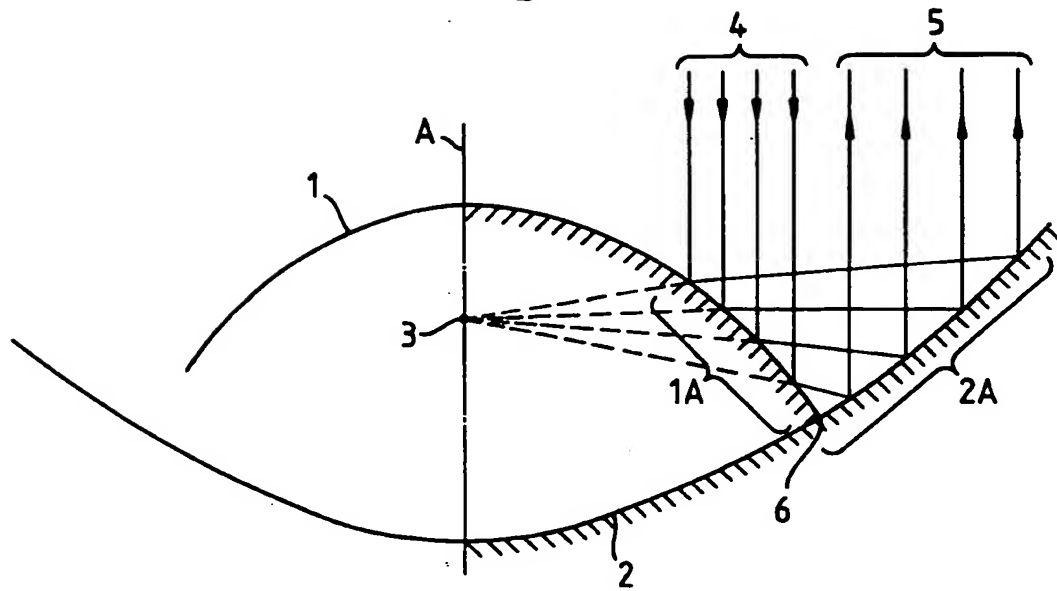


Fig.2.

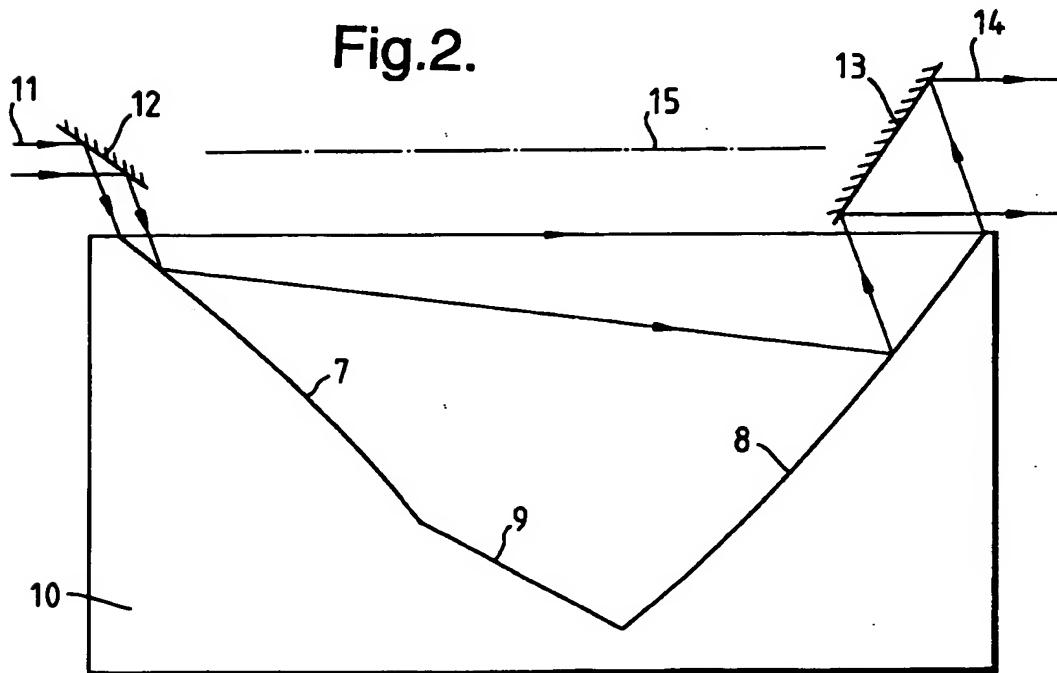


Fig.3.

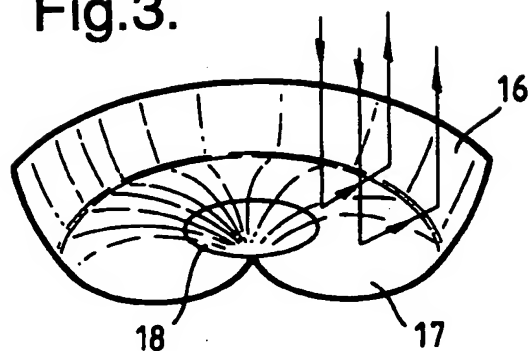


Fig.4.

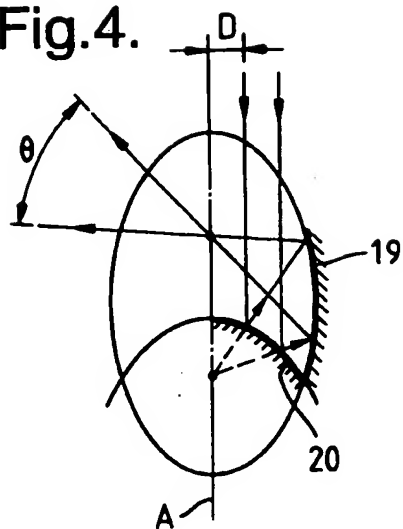


Fig.5.


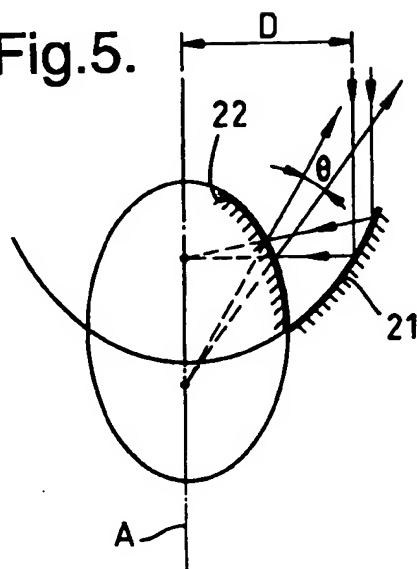


Fig.6.

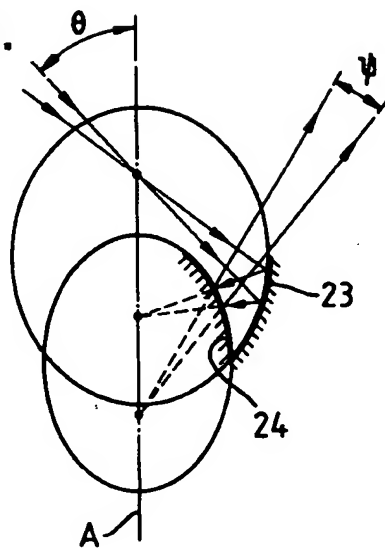

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP 03/06283

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02B17/06 B23K26/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02B B23K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages | Relevant to claim No. |
|------------|--|-----------------------|
| X | EP 0 649 042 A (BRITISH AEROSPACE) 19 April 1995 (1995-04-19) | 1-4,7 |
| Y | column 4, line 33 - line 44; figure 4 | 5,6 |
| Y | US 4 205 902 A (SHAFFER DAVID R) 3 June 1980 (1980-06-03) figure 4 | 5,6 |

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

* "A": document defining the general state of the art which is not considered to be of particular relevance

* "E": earlier document but published on or after the international filing date

* "L": document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

* "O": document referring to an oral disclosure, use, exhibition or other means

* "P": document published prior to the international filing date but later than the priority date claimed

* "I": later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

* "X": document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

* "Y": document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

* "G": document member of the same patent family

Date of the actual completion of the international search

17 September 2003

Date of mailing of the international search report

12.12.03

Name and mailing address of the ISA

European Patent Office, P.O. 5016 Patentlaan 2
NL - 2280 HV Rijswijk
Tel: (+31-70) 340-2040, Tx: 31 051 epo nl
Fax: (+31-70) 340-3018

Authorized officer

Caubet, J-S.

INTERNATIONAL SEARCH REPORT

International application No.

EP03/06283

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a):

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

SEE SUPPLEMENTAL BOX

1. ☐ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-7

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

The International Searching Authority has determined that this international application contains multiple (groups of) inventions, as follows:

1. Claims: 1-7

Laser machining device

2. Claim: 8

method for producing the reflective surfaces of an ellipsoidal mirror and of a paraboloidal mirror.

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 03/06283

| Patent document cited in search report | Publication date | Patent family member(s) | Publication date |
|---|---------------------|----------------------------|---------------------|
| EP 0649042 A | 19-04-1995 | DE 69430721 D1 | 11-07-2002 |
| | | DE 69430721 T2 | 26-09-2002 |
| | | EP 0649042 A2 | 19-04-1995 |
| | | JP 7175013 A | 14-07-1995 |
| | | US 5574601 A | 12-11-1996 |
| US 4205902 A | 03-06-1980 | NONE | |